

Combining Light Transmission and Diffusion for LED Lighting Applications

LED manufacturers and designers know how difficult it is to find a material that hides the LED source while permitting light to be transmitted at optimal levels. This is important not only to aesthetics, but it ensures optimal energy efficiency – a key goal of LED lighting technology. Trinseo has been focused on this challenge for nearly 10 years and offers a complete portfolio of resins to meet the needs of an assortment of LED Lighting applications. Available in CALIBRETM Polycarbonate Resins and EMERGETM Advanced Resins, Trinseo materials feature quality, consistency and reliability. Ask about customization too, for your most difficult applications.

Advantages and Benefits

Balancing Light Transmission and Diffusion

Trinseo's proprietary light diffusion grades offer an outstanding balance of light transmission, light diffusion and whiteness to provide uniform light distribution while hiding LED "hot spots" across a wide range of thickness values for the fabricated lens or diffuser. Table I on the next page provides transmission at various thicknesses for our light diffusion/ignition resistant grades.

Excellent Toughness

High impact and heat resistance are necessary to provide the durability needed to protect costly LED light sources. Trinseo grades feature exceptional toughness which allows down gauging potential comparable to or better than acrylic.

Ignition Resistance

Trinseo light diffusion/ignition resistant grades are available in a wide range of performance levels. Table 1 indicates UL ratings at various thicknesses from HB to 5VA.


UV Stability

Trinseo resins offer various levels of ultraviolet (UV) light resistance to help reduce the potential for color shift, loss of surface gloss and property performance over time.

Attractive Appearance

With an opalescent white base color and the ability to help hide hot spots, all Trinseo resins produce aesthetically appealing lighting and signage. Materials are available in both white and custom colored applications.

Figure 1: Trinseo materials for improved light diffusion

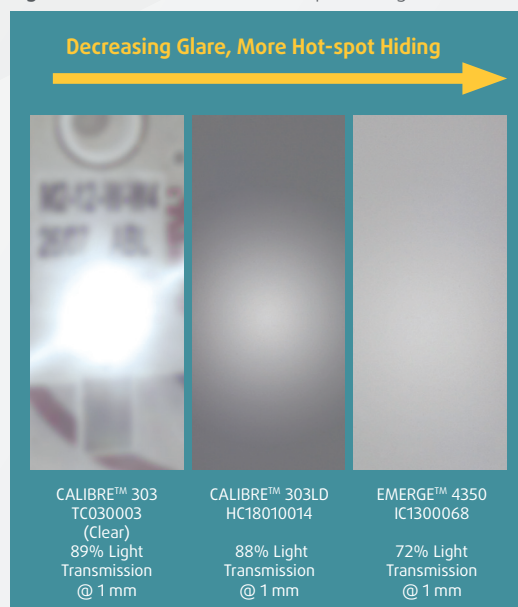

Trinseo can customize light diffusion materials to provide different appearances in a single luminaire design. The three materials shown in Figure 1 show the improved hot spot hiding capability of EMERGETM PC 4350 IC1300068 Advanced Resins compared to the other materials.



Fast Facts

Table 1: Available Trinseo Light Diffusion Series Resins

Product Name	Applications	TAT% (mm)	Degree of Light Dispersion (DLD) (T=2mm)	UL-94 Flammability Rating	UL746C Outdoor Suitability	Molding/Processing Methods
UL 94 V2 Diffusion Series						
EMERGE™ PC 4350-22 IC1300069	Half bulb cover, Troffer diffuser, Ceiling light cover	93 (1 mm)	20	V-2 @ 0.5 mm	f1	Injection molding
		81 (2 mm)		V-2 @ 1.6 mm		
EMERGE™ PC 4350-7 IC1300105	Globe bulb cover	89 (1 mm)	-	V-2 @ 0.5 mm	f1	Injection-blow molding, Injection molding
		75 (2 mm)		V-2 @ 1.6 mm		
EMERGE™ PC 4350-22 IC1300100	Half bulb cover, Troffer diffuser, Ceiling light cover	86 (1 mm)	37	V-2 @ 0.5 mm	f1	Injection molding
		70 (2 mm)		V-2 @ 1.6 mm		
EMERGE™ PC 4350-7 IC1300068	Globe bulb cover, LED lenses	72 (1 mm)	56	V-2 @ 0.5 mm	f1	Injection-blow molding, Extrusion, Injection molding
		57 (2 mm)		V-2 @ 1.6 mm		
EMERGE™ PC 4350-15 IC1300068	Globe & Half bulb cover	72 (1 mm)	56	V-2 @ 0.5 mm	f1	Injection-blow molding & Injection molding
		57 (2 mm)		V-2 @ 1.6 mm		
EMERGE™ PC 4350-7 IC1300106	Globe bulb cover & Tube cover	59 (1 mm)	59	V-2 @ 0.5 mm	f1	Injection-blow molding & extrusion
		46 (2 mm)		V-2 @ 1.6 mm		
CALIBRE™ 302V-6 LD HC18010009	Signage	25-50 (3 mm)	-	V-2 @ 1.5 mm	-	Extrusion
CALIBRE™ 303-15 LD HC18010014	Lens cover	86 (1 mm)	-	HB @ 1.5 mm	-	Injection molding
UL 94						
EMERGE™ PC 8430-7 LT IC1300094	Globe bulb cover & LED lens covers	92 (1.5 mm)	-	V0 @ 1.5 mm	f1	Injection-blow molding & extrusion
		82 (2 mm)				
EMERGE™ PC 8430-7 LT HC18010016	Globe bulb cover & LED lens covers	80.7 (1.5 mm)	-	V0 @ 1.5 mm	f1	Injection-blow molding & extrusion
EMERGE™ PC8430-7 LT HC18010017	Globe bulb cover & LED lens covers	77 (1.5 mm)	-	V0 @ 1.5 mm	f1	Injection-blow molding & extrusion
EMERGE™ PC8430-7 LT HC18010018	Globe bulb cover & LED lens covers	73 (1.5 mm)	-	V0 @ 1.5 mm	f1	Injection-blow molding & extrusion
EMERGE™ PC8430-7 LT HC18010019	Globe bulb cover & LED lens covers	64 (1.5 mm)	-	V0 @ 1.5 mm	f1	Injection-blow molding & extrusion
EMERGE™ PC8230-10	Globe bulb cover & LED lens covers	86.5 (1.5 mm)	-	V0 @ 1.5 mm	f1	Injection-blow molding, Injection molding
UL 94 V0@ 1.0 mm Diffusion Series						
EMERGE™ PC 8830-5 LT	Tube covers & LED lens covers	75 (1 mm)	-	V0 @ 1.0	f1	Extrusion
UL 94 V0@ 0.85 mm Diffusion Series						
EMERGE™ PC 8130-6 IC1300097	Bulb cover, Tube cover	74 (1 mm)	54	V0 @ 0.85 mm (optical white)	f1	Injection-blow molding, Extrusion
EMERGE™ PC 8130-6 IC1300080	Bulb cover, Tube cover	68 (1 mm)	56	V0 @ 0.85 mm (optical white)	f1	Injection-blow molding, Extrusion
EMERGE™ PC 8130-6 IC1300102	Bulb cover, Tube cover	71 (0.85 mm)	58	V0 @ 0.85 mm (optical white)	f1	Injection-blow molding, Extrusion
		66 (1 mm)				
EMERGE™ PC 8130-6 IC1300096	Bulb cover, Tube cover	60 (1 mm)	53 (1 mm)	V0 @ 0.85 mm (optical white)	f1	Injection-blow molding, Extrusion

Degree of light dispersion measured with an optical goniophotometer. DLD or half gain angle D_{50} determines angle at which 50% of the light intensity value of the zero angle light intensity is reached. Theoretical best is 60.

Applications

LED tube lamp covers, A-lamp bulbs, lenses, troffers and signage.

Processing Methods

Injection Molding, injection blow molding and sheet/profile extrusion.

Focused on Meeting Your Needs

Trinseo CALIBRE™ Polycarbonate Resins and EMERGE™ Advanced Resins are specifically designed for applications that balance light transmission and diffusion. Custom formulations are no problem. Trinseo collaborates with customers in the Lighting industry to ensure that the materials selected meet the specific needs of each application including property performance, part design, manufacturing and regulatory requirements.

Contact Information

Commercial

Bill Marshall

Senior Account Executive
Kingsley, MI

+1-231-263-0260
WBMarshall@trinseo.com

Pam White

Account Executive
Yorktown Heights, NY

+1-914-526-4289
pmwhite@trinseo.com

Distributon

Melissa Such

Distribution Channel Manager
Maple Grove, MN

+1-763-478-3077
MSuch@trinseo.com

Technical

Kersten Terry

Technical Service & Development
Midland, MI

+1-989-636-3857
terryka@trinseo.com

Kurt Klein

Technical Service & Development
Midland, MI

+1-989-636-3419
kklein@trinseo.com

Committed to the electrical and lighting industry. In addition to its light diffusion/ignition resistant grades, Trinseo offers a full portfolio of CALIBRE™ Polycarbonate Resins and EMERGE™ Advanced Resins for use in LED Lighting and other electrical applications.

For more information contact us at 1-855-TRINSEO (+1-855-874-6736) or visit us online at <http://www.trinseo.com/na/en/industries/electrical/>.



The principles of Responsible Care® and Sustainable Development influence the production of printed literature for Trinseo S.A. and its affiliated companies. As a contribution towards the protection of our environments, Trinseo's printed literature is produced in small quantities and on paper containing recovered/post-consumer fiber and using 100 percent soy-based ink whenever possible.

PRODUCT STEWARDSHIP

Trinseo and its affiliated companies have a fundamental concern for all who make, distribute, and use their products and for the environment in which we live. This concern is the basis for our Product Stewardship philosophy by which we assess the safety, health, and environmental information on our products so that appropriate steps may be taken to protect employee and public health and our environment. The success of our product stewardship program rests with each and every individual involved with Trinseo products – from the initial concept and research, to manufacture, use, sale, disposal, and recycle of each product.

CUSTOMER NOTICE

Customers are responsible for reviewing their manufacturing processes and their applications of Trinseo products from the standpoint of human health and environmental quality to ensure that Trinseo products are not used in ways for which they are not suitable. Trinseo personnel are available to answer questions and to provide reasonable technical support. Trinseo product literature, including safety data sheets, should be consulted prior to the use of Trinseo products. Current safety data sheets are available from Trinseo.

No freedom from infringement of any patent owned by Trinseo or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, the customer is responsible for determining whether products and the information in this document are appropriate for the customer's use and for ensuring that the customer's workplace and disposal practices are in compliance with applicable legal requirements. Although the information herein is provided in good faith and was believed to be accurate when prepared, Trinseo assumes no obligation or liability for the information in this document.

NOTICE REGARDING MEDICAL APPLICATION RESTRICTIONS

Trinseo requests that customers refer to Trinseo's Medical Application Policy <http://www.trinseo.com/medical.htm> before considering the use of Trinseo products in medical applications. The restrictions and disclaimers set forth in that policy are incorporated by reference.

DISCLAIMER

TRINSEO MAKES NO WARRANTIES, EITHER EXPRESS OR IMPLIED, IN THIS DOCUMENT; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE (INCLUDING MEDICAL APPLICATIONS) ARE EXPRESSLY EXCLUDED. TRINSEO DISCLAIMS ANY AND ALL LIABILITY FOR LOSSES OR DAMAGES THAT MAY RESULT FROM THE USE OF TRINSEO PRODUCTS IN UNSUPPORTED USE. TRINSEO MAKES NO WARRANTIES, EXPRESS OR IMPLIED, THAT THE USE OF ANY TRINSEO PRODUCT WILL BE FREE FROM ANY INFRINGEMENT CLAIMS.

For more information on products, innovations, expertise, and other services available from Trinseo, visit www.trinseo.com, or contact us as indicated below.

North America

U.S. +1-855-TRINSEO (+1-855-874-6736)
U.S. & Canada +1-989-633-1718

Latin America

Brazil +55-11-5184-8722
Argentina, Chile, South Region of LAA +54-11-4319-0100
Mexico, Colombia, North Region of LAA +52-55-5201-4700

Europe/Middle East/Africa

+800-444-11-444
+31-11567-2601

Asia Pacific

+603-7965-53-19

China +86-21-3851-1017

Email

CI@trinseo.com

www.trinseo.com

GENERAL NOTICE

Any photographs of end-use applications in this document represent potential end-use applications but do not necessarily represent current commercial applications, nor do they represent an endorsement by Trinseo of the actual products. Further, these photographs are for illustration purposes only and do not reflect either an endorsement or sponsorship of any other manufacturer for a specific potential end-use product or application, or for Trinseo, or for specific products manufactured by Trinseo.

If products are described as "experimental" or "developmental": (1) product specifications may not be fully determined; (2) analysis of hazards and caution in handling and use are required; (3) there is greater potential for Trinseo to change specifications and/or discontinue production, and (4) although Trinseo may from time to time provide samples of such products, Trinseo is not obligated to supply or otherwise commercialize such products for any use or application whatsoever.

For additional information not covered by the content of this document or to ensure you have the latest version of this document available, please refer to the Customer Information Group contact information on our website at www.trinseo.com/contact/.

Copyright© Trinseo (2015) All rights reserved.

™Trademark of Trinseo S.A. or its affiliates

®Responsible Care is a service mark of the American Chemistry Council